




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 11/00	A1	(11) International Publication Number: WO 95/07596 (43) International Publication Date: 16 March 1995 (16.03.95)
<p>(21) International Application Number: PCT/GB94/01897</p> <p>(22) International Filing Date: 1 September 1994 (01.09.94)</p> <p>(30) Priority Data: 93307144.1 10 September 1993 (10.09.93) EP</p> <p>(34) Countries for which the regional or international application was filed: GB et al.</p> <p>(71) Applicant: BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).</p> <p>(72) Inventor: SHABEER, Mohammed; 304 Cauldwell Hall Road, Ipswich, Suffolk IP4 5AJ (GB).</p> <p>(74) Agent: PRATT, David, Martin; BT Group Legal Services, Intellectual Property Dept., 13th floor, 151 Gower Street, London WC1E 6BA (GB).</p>		<p>(81) Designated States: AU, CA, CN, JP, KR, NZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>

(54) Title: OPTICAL DECODING FOR MANCHESTER ENCODED SIGNALS

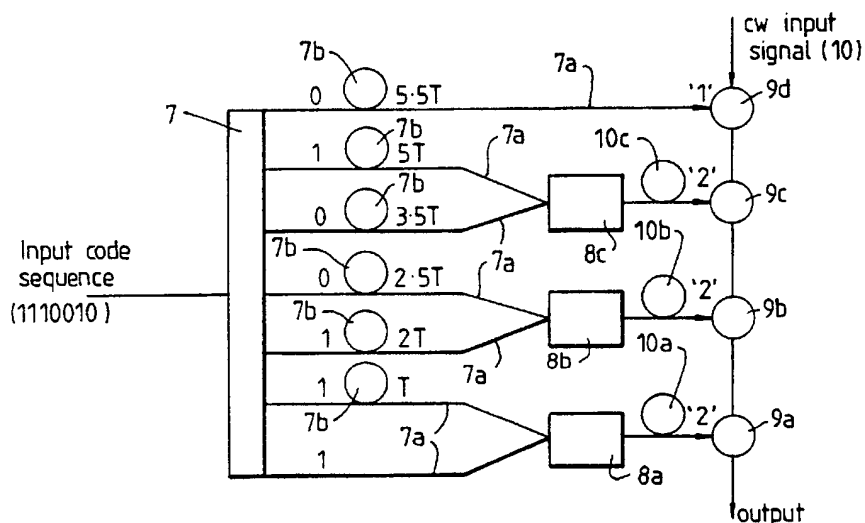

(57) Abstract

An optical code recognition unit (OCRU) for recognising a predetermined n-bit optical code sequence coded using the Manchester code format, has an n-way splitter (7) having an input and n parallel outputs (7a). A plurality of gates (9a, 9b, 9c, 9d) are associated with the splitter outputs (7a), respective pairs of splitter outputs leading to each of the gates (9a, 9b, 9c) via a respective optical combiner (8a, 8b, 8c), and any remaining single splitter output leading directly to its gate (9d). Each of the splitter outputs (7a) is subject to a different delay of m half bit periods, where m = 0 to 2(n-1), the values of m being chosen such that, if a predetermined optical code sequence is applied to the splitter input, the '1's in the outputs of each of the pairs of splitter outputs (7a) reach the associated AND gates (9a, 9b, 9c) and the '1' in any remaining single splitter output (7a) reaches its AND gate (9d) at predetermined times such that all the gates are turned on.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo			SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

- 1 -

OPTICAL DECODING FOR MANCHESTER ENCODED SIGNALS.

This invention relates to optical processing in networks carrying packetised signals, and in particular to an all-optical code recognition unit for such a network.

5 Optical fibre communication offers many advantages over conventional wire based systems, these advantages including reduced losses, increased bandwidth, immunity from electromagnetic interference (EMI), and a high level of security. The application of optical fibre technology into
10 the local area network (LAN) is, therefore, of increasing interest. In the past, however, it has been assumed that optical networks will only penetrate small business and residential sectors if new broadband services are provided to offset the additional costs involved in the installation of
15 the optical technology. Some of the broadband services that could be provided are alpha-numeric videotex (e.g. Prestel), photographic videotex, high definition television, interactive video on demand (video library), video telephony, interactive graphics and high-speed data services.

20 Although the importance of providing such services has been recognised for some time, it is difficult for telecommunications operating companies to predict their market potential and therefore justify a major investment. What is required is an entry strategy that allows optical technology
25 to be installed economically for telephony and low-speed data services, while maintaining the potential for evolution at a marginal cost for future broadband services.

In known optical networks, routing of information is achieved at each node by electronic means, that is to say by
30 detecting the received optical signal to give an electrical signal (plus detector noise). This electrical signal must be regenerated, after processing and switching to remove the noise, before the signal is re-transmitted optically. Regeneration is bit-rate dependent, and so restricts the
35 information type that can be carried, thereby preventing the transmission of broadband services. The need for regeneration

- 2 -

could be removed by coupling off, at each node, part of the received optical signal, the coupled-off signal being converted to an electronic signal which is electronically processed, the remaining uncoupled optical signal being re-
5 routed by the electronic processor. Unfortunately, the electronic processing times severely limit the possible capacity of the optical links, so again the provision of broadband services is not practical. Thus, although the electronic processor can switch quickly (of the order of
10 nanoseconds) it requires a relatively long time (of the order of microseconds) to process, and therefore to decide upon the necessary route of the signal. In this scheme, the uncoupled optical signal is delayed during the processing time by a long length of optical fibre, and this obviously increases the size
15 of each switching node.

Optical routing of information at the nodes of such an optical network would increase the capacity of the network by reducing the processing time. Not only would this increase the capacity of the network, it would also decrease the vast
20 delay lengths of optical fibre otherwise required. Optical signal processing is well known, but the particular method of optical routing in a given network will depend upon the nature of that network. A particularly advantageous type of optical network is the recently developed telephony over passive
25 optical networks (TPON). This type of network has no routing mechanisms, that is to say all terminals receive all the information transmitted by the exchange. One of the main advantages offered by TPON is the ability to move transmission between customers. This is because the gross bit-rate used
30 with TPON is 20Mbit/s (chosen mainly to allow cheap CMOS realisation of signal processing chips), and this is divided into a basic granularity of 8kbit/s, that is to say 8kbit/s is the basic transmission unit that can be moved from customer to customer (or can be summed to provide channels of nx8kbit/s
35 capacity). This ability suggests that TPON will be particularly applicable to the small business sector. TPON also shows great promise for the economic provision of optical

- 3 -

fibre to the telephony customer, with major potential for later extension to broadband integrated services digital networks (ISDN).

In order to enhance management and flexibility of the core of the network of the telecommunications network, a synchronous digital hierarchy (SDH) managed transmission network is planned as a replacement for the present asynchronous trunk and junction networks. An SDH network would have four different levels, with a passive optical network (PON) at the lowest (Access) level, and a high capacity routed network at the upper (Inner Core or Long Haul) level. The Inner Core level would benefit the most from optically-controlled routing, as this level requires the largest capacity. The increase in capacity required at the Access level (because of the addition of extra services) would, however, benefit from the use of optical routing. At the Access level, it is envisaged that there would be sixty-four access points to each node. It would, therefore, be possible to address each individual node by a series of code sequences, each code sequence allowing up to sixty-four permutations.

One method of implementing an SDH network, that achieves flexibility and supports the divergent needs of future services, is based on packet switching which is currently used in data networks where error-free communication is required. The protocols required for such a system contain sophisticated methods for correcting, retransmitting or re-routing packets, and so need a lot of processing which can cause long delays. To accommodate delay-critical, but error-tolerant services, such as voice, a much simpler protocol can be used to minimise the processing time required. An example of this technique, which is known as asynchronous transfer mode (ATM) is used for fast packet switching or asynchronous time division (ATD).

ATM is a label multiplexing technique that uses short, fixed length packets, or cells. The ATM cells are short to reduce packetisation delay, and are of fixed length to make it easier to bound delays through switches and multiplexers.

- 4 -

They have short labels (or headers) to allow cells to be routed, at high speeds, by means of hardware routing tables at each switch. For large transmission bandwidths (~1Gbit/s or more) this routing may be most effectively performed optically via optical code recognition (OCR).

The packet header and information fields must be separated at nodes where OCR of the header is to take place. This could be achieved by having the information field at bit-rates far in excess of the header bit rate and the response time of the optical code recognition unit (OCRU), so that the OCRU, being too slow to "see" the information field bit rate will only "see" a constant intensity after the header. Alternatively, and preferably, the header and information fields could be at different wavelengths, so that they may be split easily, either by a wavelength dependent coupler or by means of wavelength division multiplexing technology.

In developing a system of optical code recognition for use in optical routing of TPON, the following requirements must be met, namely: -

(a) Around 64 codes are required with the minimum of redundancy. This is due to the SDH network requiring up to 64 codes at each level of the network adequately to address each access terminal;

(b) The OCRU should be self timing, that is to say a clock signal should not be required to synchronise the OCRU;

(c) The OCRU should be realised using the minimum number of components, thus keeping cost and complexity down;

(d) The match/mismatch decision of the OCRU must be achieved very quickly, that is to say the OCRU must have lower processing times than electronic systems; and

(e) The logic level of the OCRU output should be kept to a minimum, since multiple level logic is easily degraded by the noise that is always present in real systems.

The specification of our International patent application GB 93/00090 describes an OCRU for recognising a predetermined n-bit optical code. The OCRU comprises an n-way splitter having an input and n parallel outputs, a plurality

- 5 -

of combiners associated with the splitter outputs, and a respective gate controlled by the output of each of the combiners. Each of the splitter outputs is subject to a different delay of from 0 to $(n-1)$ bit periods, and each
5 combiner receives an input from at least one of the splitter outputs. The OCRU is such that all the gates are turned on if a predetermined optical code is applied to the splitter input. Each combiner is configured to operate at 2-level logic, and the arrangement is such that, when the predetermined optical
10 code is input to the n -way splitter, each combiner receives an input of one or more '0's or one or more '1's, and each combiner receiving '1' inputs receives a maximum of two such inputs.

With this arrangement, each gate receiving one or more
15 '1's performs the 'AND' logic operation, and each gate receiving one or more '0's performs the 'INVERTER' logic operation. The disadvantage of this is that, although 'AND' logic operations can be implemented fairly easily in a number of technologies, for example by semiconductor based devices,
20 fibre based devices (such as loop mirrors) or polymer devices, 'INVERTER' logic operations are much harder to implement. Another disadvantage of this known split-and-combine technique is that two bits (the first and last) must be used for identifying the start and end of an input code sequence, so
25 the code efficiency of the technique is reduced to 25%.

The present invention provides an OCRU for recognising a predetermined n -bit optical code sequence coded using the Manchester code format, the OCRU comprising an n -way splitter having an input and n parallel outputs, and a plurality of AND
30 gates associated with the splitter outputs, respective pairs of splitter outputs leading to each of the AND gates via a respective optical combiner, and any remaining single splitter output leading directly to its AND gate, wherein each of the splitter outputs is subject to a different delay of m half bit
35 periods, where $m = 0$ to $2(n - 1)$, the values of m being chosen such that, if a predetermined optical code sequence is applied to the splitter input, the '1's in the outputs of each of the

- 6 -

pairs of splitter outputs are input to the associated AND gates and the '1' in any remaining single splitter output is input to its AND gate at predetermined times such that all the AND gates are turned on.

5 Advantageously, the gates are positioned in series between an input device and an output device, whereby a signal input by the input device will reach the output device if the predetermined code is input to the n-way splitter. Preferably, the input to each of the AND gates except that
10 nearest the input device is subjected to a predetermined delay, whereby the signal input by the input device will reach the AND gates at substantially the same time as said inputs. Each of the AND gates may be an SLA.

The invention also provides a system for processing
15 packetised signals in a network comprising a head-end packet signal transmitter and an plurality of customer receivers, the system comprising a respective apparatus associated with each customer receiver, each apparatus comprising separator means for separating header field information from data field
20 information in packets, first transmission means for transmitting the header field information to a switch associated with the respective customer receiver, and second transmission means for transmitting the data field information to said switch, wherein each first transmission means includes
25 an OCRU as hereinbefore defined, and wherein each apparatus is such that the respective OCRU activates the associated switch to permit the passage of the data field information of a given packet only if the optical code contained in the header field information of that packet is the predetermined optical code
30 of that OCRU.

Conveniently, each of said switches is a bistable switch constituted by an SLA.

Advantageously, a respective wavelength-dependent coupler constitutes the separator means of each apparatus.

35 Preferably, the second transmission means of each apparatus includes an optical delay fibre of such a length that the header field information of a given packet reaches

- 7 -

the switch substantially as the switch is activated by the OCRU.

Advantageously, the network is a packet switched network, the head-end packet signal transmitter is a head-end packet transmitter, and the packets are cells consisting of headers and data.

An optical routing apparatus incorporating an optical code recognition unit constructed in accordance with the invention will now be described in greater detail, by way of example, with reference to the accompanying drawings, in which: -

Figure 1 is a schematic representation of the routing apparatus;

Figure 2 is a schematic representation of an optical code recognition unit forming part of the apparatus of Figure 1; and

Figures 3a and 3b illustrate the Manchester code format used in the invention.

Referring to the drawings, Figure 1 is a schematic representation of a customer-end optical routing apparatus for use with a TPON system carrying packetised signals (one cell of which is indicated by the reference numeral 1). Each cell 1 has a data field 1a and a header field 1b, these two fields being transmitted at different wavelengths. The customer-end routing apparatus includes a wavelength dependent coupler 2 which separates the header field information from the data field information. The header field information is fed to a bistable switch 3 (and then on to the customer's receiver 4) via an OCRU 5. The data field information is fed to the bistable switch 3 via a delay fibre 6. The bistable switch 3 is constituted by a split-contact laser amplifier having a maximum rise time of less than 200 psec.

The OCRU 5 is configured to a particular optical code which is unique to the customer concerned, the optical code corresponding to all or part of the header field 1b. The OCRU 5 will, therefore, provide an output signal only when it recognises the particular optical code appropriate to the

- 8 -

customer. This output signal is used to control the bistable switch 3 so that the data field information is routed to the receiver 4. The delay fibre 6 is chosen to ensure that the data field 1a of the same cell 1 as the header field 1b
5 recognised by the OCRU 5 is passed to the receiver 4. Consequently, signals (packets) intended for other customers will not be routed to that particular customer's receiver 4.

Figure 2 shows the OCRU 5, this OCRU being configured to recognise the optical code 1110010. The OCRU 5 includes a
10 passive seven-way optical splitter 7 having seven parallel output fibres 7a, three optical combiners 8a, 8b and 8c and four SLA gates 9a, 9b, 9c and 9d. Each of the fibres 7a is given a different delay so that the splitter 7 converts the serial input code into a parallel output code, with one bit of
15 the code on each of the output lines 7a.

The OCRU 5 is configured to work with incoming code sequences coded using the Manchester code format. In this format (see Figures 3a and 3b), '1's and '0's are represented as 01 and 10 respectively in the input header code sequences,
20 though it will be appreciated that the '1's and '0's could alternatively be represented by 10 and 01 respectively. In the optical domain, the transmitted levels of the header code sequences correspond to light 'on' or 'off' to represent the values of '1' and '0' respectively. The important point to
25 note is that each bit period T has a signal of duration T/2 either in the first half (representing a '0') or the second half (representing a '1') of the bit period. It should also be noted that the Manchester code format does not double the number of bits in the input code sequence, but doubles the
30 modulation bandwidth.

The architecture of the OCRU 5 (see Figure 2) is such that the incoming code sequence 1110010 is split and differentially delayed. This is achieved by incorporating lengths of delay fibre 7b in each of the output lines 7a
35 except that associated with the last bit of the input header (that is to say the most significant bit). The length of each of the delay fibres 7b is pre-selected so that the outputs on

- 9 -

the output lines 7a reach the gates 9a to 9d at the same time. Because the input code is in the Manchester code format, this requires the delays on the lines to be $5.5T$, $5T$, $3.5T$, $2.5T$, $2T$, T and zero respectively for the bits of the input code, with the last bit of the input header having a zero delay.

In the particular OCRU 5 shown in Figure 2, a first pair of output lines 7a (which carry the two most significant bits) are input into the optical combiner 8a, a second pair of output lines 7a (which carry the next two most significant bits) are input into the optical combiner 8b, a third pair of output lines 7a (which carry the next two most significant bits) are input into the optical combiner 8c, and the final output line 7a (which carries the least significant bit) is input directly into the gate 9d.

Considering now the output of the OCRU 5 when it is fully loaded, that is to say when the most significant bit of the input header code sequence enters the splitter 7 and forms an input to the optical combiner 8a along with the second most significant bit from the arm with the delay T . Because both these input bits are '1's, and the delay on the line 7a associated with the second most significant bit is a whole bit period, the output of the optical combiner 8a has a value 2. Similarly, the optical combiner 8b has two inputs of '1's from the lines 7a with delays $2T$ and $2.5T$, so its output also has a value 2. Again, the optical combiner 8c has inputs from its associated lines 7a which are both '1's (the delays on these arms being $3.5T$ and $5T$), so that the output of the optical combiner 8c also has a value 2. The AND gates 9a, 9b and 9c, which respectively receive the outputs of the optical combiners 8a, 8b and 8c, are configured to switch on for a two level input, and the AND gate 9d which receives the output of the remaining line 7a from the splitter 7 is configured to switch on for a one level input. Consequently, if the OCRU 5 does receive the "correct" code 1110010, all four AND gates 9a to 9d will be turned on, and an input signal 10 from a continuous wave (cw) laser (not shown) will be passed to the bistable switch 3. In order to ensure that each of the AND

- 10 -

gates 9c, 9b and 9a receives its input from the associated optical combiner 8c, 8b and 8a simultaneously with the cw input signal passed from the AND gate immediately upstream thereof, a respective delay fibre 10c, 10b and 10a of appropriate length is included between each pair of devices 9c and 8c, 9b and 8b, and 9a and 8a. The switch 3 will then be turned on, so that the information carried by the data field 1a of that cell whose header field 1b carries that code is passed to the associated receiver 4. It will be appreciated that a match of the code will be recognised almost instantaneously with the input of the final (most significant) bit of the code, so that the processing time of the OCRU 5 is almost zero. As the AND gates 9a, 9b and 9c are configured to operate at two-level logic, the entire OCRU 5 operates at two-level logic. This avoidance of multiple-level logic is advantageous, in that multiple-level logic is easily degraded by the noise that is always present in real systems. More importantly, however, all the gates 9a, 9b, 9c and 9d are AND gates, and so these devices can be easily implemented in a number of technologies, and in particular in semiconductor or fibre-based technologies. Simple passive components can be used for splitting, time delay and combining; and the split, delay and combine parts of the OCRU 5 could easily be fabricated in silica-on-silicon integrated technology. Also, there is no need for the first and last bits to be used to identify the start and finish of an input code sequence, so that the code efficiency of this arrangement is ~100% where there is a large number of unique codes.

Clearly, the particular form of OCRU required for each customer will depend upon the code allocated to that customer. In each case, however, the OCRU will operate at 2-level logic, and the maximum number of SLA gates will be four for a 7-bit code.

One disadvantage of the OCRU described above is that the bistable switch 3 outputs only the data field 1a of the recognised cell. An additional device such as an optical transmitter must, therefore, be provided to re-input the

- 11 -

header field 1b for each cell not recognised. To remove the need for this additional device, the OCRU may be modified by replacing the coupler 2 with a 90/10 splitter, in which case 90% of the signal is directed towards the bistable switch 3, and 10% towards the OCRU. In this case, the header field 1b is distinguished from the data field 1a in the OCRU by its modulation speed (the modulation speed of the data field being too fast for the response time of the gates). When a header field 1b is recognised by the OCRU, the bistable switch 3 is triggered to pass the 90% part of the signal, so that header information is passed along with the data.

In another modified arrangement, the data and header fields 1a and 1b are on different wavelengths, and the coupler 2 is a 90/10 coupler. A filter is positioned between the coupler 2 and the OCRU 5 to prevent data signals reaching the OCRU. Here again, this arrangement does not require an additional laser to re-input the header field 1b. Moreover, the data and header fields 1a and 1b need not be at different speeds/bit rates.

In a further alternative, a time-dependent switch can be used to separate the header field 1b from the data field 1a. This switch would be triggered by a clock signal extracted from the main input signal.

The routing apparatus of the invention could handle any form of packetised signal, where the packets (or cells) are divided into header byte(s) and data byte(s), such as the ATM format. Although at the current agreed maximum rate of 140 Mbit/s optical routing is unlikely to be beneficial, standard agreement at higher rates could change this situation.

It will be apparent that modifications could be made to the routing apparatus described above. For example, the bistable switch 3 could be replaced by any type of 2x2 switch, either optically or electronically controlled. If the switch is electronically controlled, it will need to be provided with an opto-electronic connector. It would also be possible to replace the SLA AND gates technology by AND gates in other technologies such as fibre-based devices.

- 12 -

CLAIMS

1. An OCRU for recognising a predetermined n-bit optical code sequence coded using the Manchester code format, the OCRU comprising an n-way splitter having an input and n parallel outputs, and a plurality of AND gates associated with the splitter outputs, respective pairs of splitter outputs leading to each of the AND gates via a respective optical combiner, and any remaining single splitter output leading directly to its AND gate, wherein each of the splitter outputs is subject to a different delay of m half bit periods, where $m = 0$ to $2(n - 1)$, the values of m being chosen such that, if a predetermined optical code sequence is applied to the splitter input, the '1's in the outputs of each of the pairs of splitter outputs are input to the associated AND gates and the '1' in any remaining single splitter output is input to its AND gate at predetermined times such that all the AND gates are turned on.

2. An OCRU as claimed in claim 1, wherein the AND gates are positioned in series between an input device and an output device, whereby a signal input by the input device will reach the output device if the predetermined code is input to the n-way splitter.

3. An OCRU as claimed in claim 2, wherein the input to each of the AND gates except that nearest the input device is subjected to a predetermined delay, whereby the signal input by the input device will reach the AND gates at substantially the same time as said inputs.

4. An OCRU as claimed in any one of claims 1 to 3, wherein each of the AND gates is constituted by an SLA.

5. An OCRU substantially as hereinbefore described with reference to, and illustrated by, the accompanying drawings.

- 13 -

6. A system for processing packetised signals in a network comprising a head-end packet signal transmitter and an plurality of customer receivers, the system comprising a respective apparatus associated with each customer receiver, each apparatus comprising separator means for separating header field information from data field information in packets, first transmission means for transmitting the header field information to a switch associated with the respective customer receiver, and second transmission means for transmitting the data field information to said switch, wherein each first transmission means includes an OCRU as claimed in any one of claims 1 to 5, and wherein each apparatus is such that the respective OCRU activates the associated switch to permit the passage of the data field information of a given packet only if the optical code contained in the header field information of that packet is the predetermined optical code of that OCRU.

7. A system as claimed in claim 6, wherein each of said switches is a bistable switch.

8. A system as claimed in claim 7, wherein each of the bistable switches is constituted by an SLA.

9. A system as claimed in any one of claims 6 to 8, wherein a respective wavelength-dependent coupler constitutes the separator means of each apparatus.





10. A system as claimed in any one of claims 6 to 9, wherein the second transmission means of each apparatus includes an optical delay fibre of such a length that the header field information of a given packet reaches the switch substantially as the switch is activated by the OCRU.

11. A system as claimed in any one of claims 6 to 10, wherein the network is a packet switched network, the head-end packet signal transmitter is a head-end packet transmitter,

- 14 -

and the packets are cells consisting of headers and data.

12. A processing system substantially as hereinbefore described with reference to, and as illustrated by, the accompanying drawings.

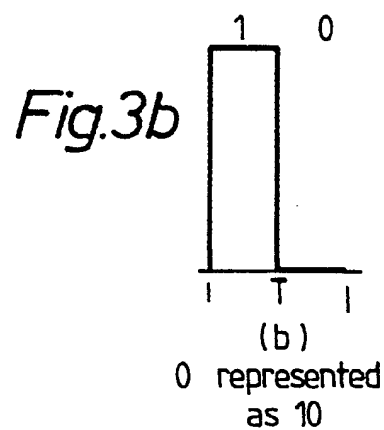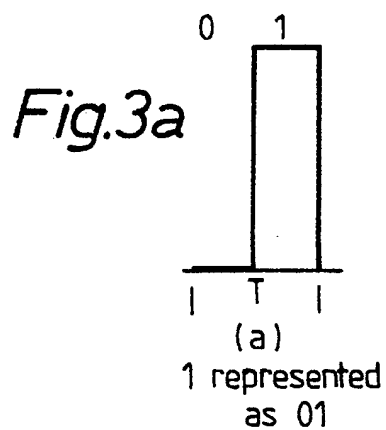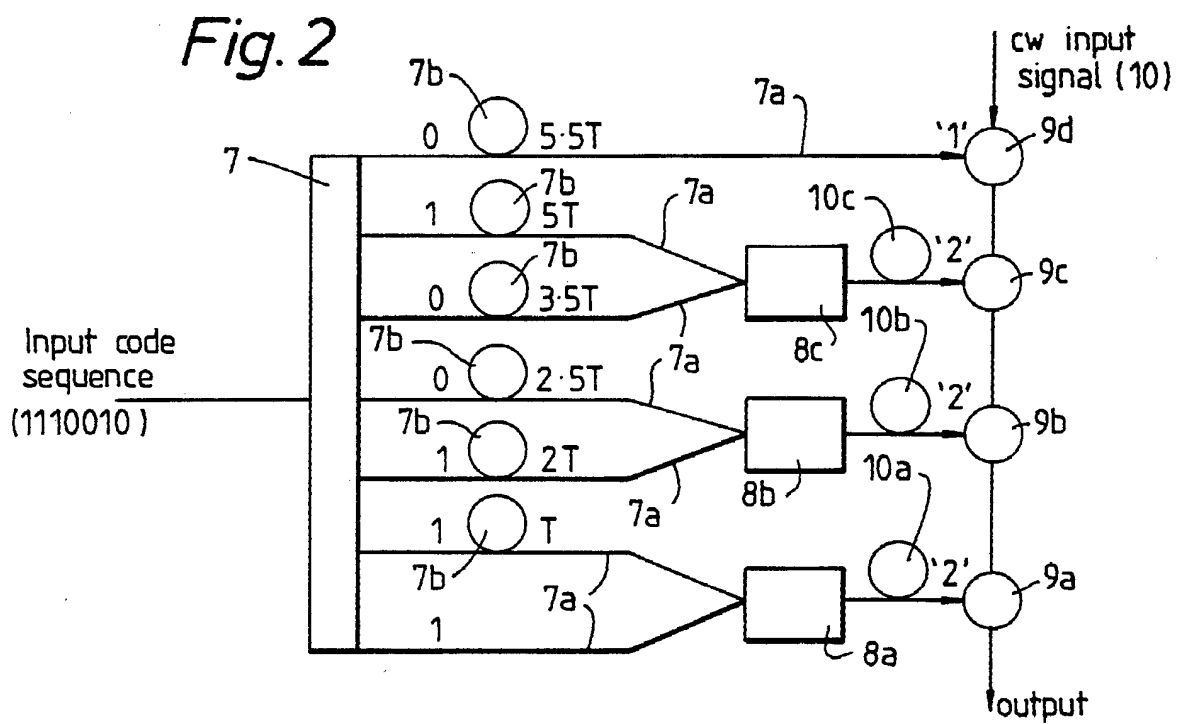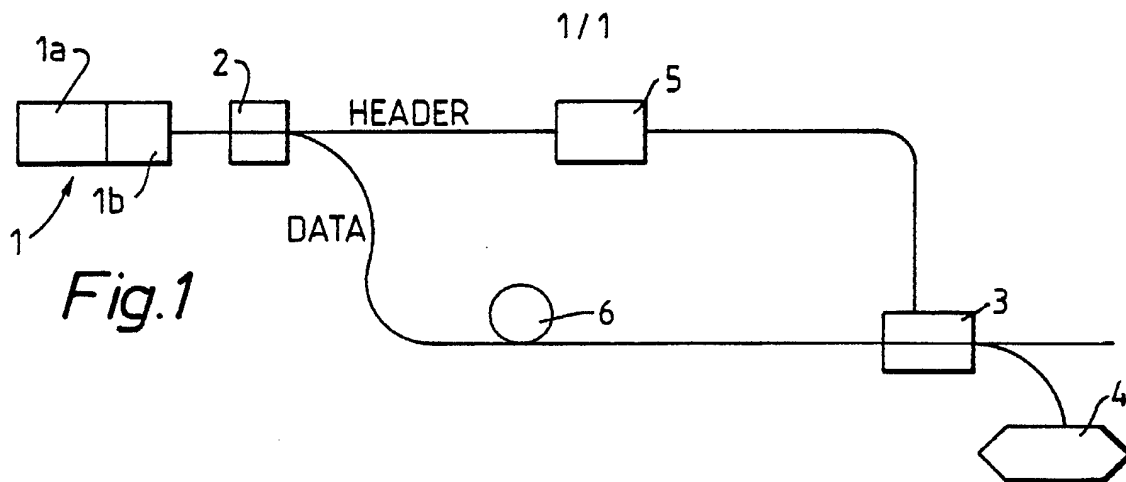

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 94/01897

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q G06E H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO,A,93 14604 (BRITISH TELECOMMUNICATIONS PLC) 22 July 1993 cited in the application see the whole document ---	1-4,6-11
Y	ELECTRONIC DESIGN, vol.26, no.22, 25 October 1978, HASBROUCK HEIGHTS, NEW JERSEY US pages 84 - 91 D.J. MORRIS 'Code your fiber-optic data for speed, without losing circuit simplicity' see the whole document ---	1-4,6-11
A	WO,A,91 18485 (ASCOM TECH AG) 28 November 1991 see the whole document ---	1-4,6-11
-/--		



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 October 1994

Date of mailing of the international search report

26. 10.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

O'Reilly, D

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 94/01897

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>ELECTRONICS LETTERS, vol.24, no.18, 1 September 1988, STEVENAGE GB pages 1151 - 1153 H. IZADPANAH 'Direct Timing Extraction in a Modified-Manchester Coded Picosecond Optical Pulse Fibre Optic Transmission System' see the whole document -----</p>	1-4,6-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/GB 94/01897

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9314604	22-07-93	CA-A- 2120623	22-07-93
WO-A-9118485	28-11-91	EP-A- 0484482	13-05-92
		JP-T- 5501185	04-03-93